




Notes:

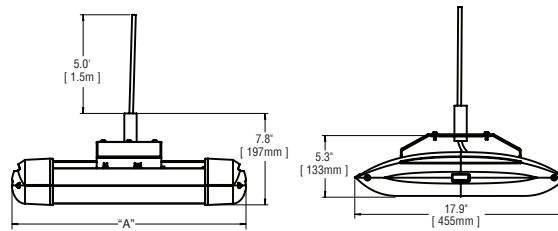

# of LEDs	40	60	80	100	120	140	160	200	240
Dim. "A"	16.06"	18.06"	16.06"	18.06"	20.06"	22.06"	24.06"	28.06"	32.06"

Product	Family	Optic	Mounting	# of LEDs (x 10)	LED Series	Voltage	Color Options	Drive Current	Factory-Installed Options	
						Not Field Adjustable	Please type additional options in manually on the lines provided above.			
CAN	EDG	5S ¹	PD ²	04 ³ 06 ⁴ 08 10 12 14 16 20 24	D	UL Universal 120-277V UH Universal 347-480V 12V 240V 277V 34 347V	SV Silver BK Black BZ Bronze PB Platinum WH White	350 350mA 525 ⁵ 525mA 700 ⁶ 700mA	43K DIM F HL P ML	4300K Color Temperature ⁷ 0-10V Dimming ^{8,9} Fuse ^{10,11,12} Hi/Low (175/350/525, dual circuit input) ¹³ Photocell ^{12,14,15} Multi-Level (75/525) ¹³

Footnotes

- IESNA Type V Short distribution
- Pendant mount
- Uses 80 LED size with two blanks in outside positions
- Uses 100 LED size with two blanks in outside positions
- Available on fixtures with 40-160 LEDs
- Available on fixtures with 40-60 LEDs
- Color temperature per luminaire; 6000K standard; minimum 70 CRI
- Control by others
- Refer to dimming spec sheet for availability and additional information
- When code dictates fusing use time delay fuse
- Not available when UH voltage is selected
- Not available with all multi-level options. Refer to multi-level spec sheet for availability and additional information
- Refer to multi-level spec sheet for availability and additional information
- Must specify voltage other than UL or UH
- 120 LED maximum when 34 voltage is selected

LED PERFORMANCE SPECS

# of LEDs	Initial Delivered Lumens – Type V Short @ 6000K	BUG Rating***			Initial Delivered Lumens – Type V Short @ 4300K	BUG Rating***			System Watts 120-480V	Total Current @ 120V	Total Current @ 240V	Total Current @ 277V	Total Current @ 347V*	Total Current @ 480V*	L ₇₀ Hours** @ 25° C (77° F)	50K Hours Lumen Maintenance Factor** @ 15° C (59° F)
		B	U	G		B	U	G								
350mA Fixture Operating at 25° C (77° F)																
40 ³	4,472 (04)	2	1	1	4,122 (04)	2	1	1	47	0.40	0.21	0.19	0.15	0.12	>150,000	93%
60 ⁴	6,622 (06)	3	1	1	6,103 (06)	3	1	1	68	0.58	0.30	0.26	0.20	0.16	>150,000	
80	8,829 (08)	3	1	1	8,137 (08)	3	1	1	90	0.77	0.38	0.34	0.26	0.20	>150,000	
100	11,009 (10)	3	1	2	10,146 (10)	3	1	2	111	0.95	0.47	0.42	0.32	0.24	>150,000	
120	13,210 (12)	4	1	2	12,175 (12)	3	1	2	132	1.15	0.56	0.50	0.38	0.28	>150,000	
140	15,342 (14)	4	1	2	14,140 (14)	4	1	2	157	1.34	0.67	0.61	0.47	0.35	149,000	
160	17,534 (16)	4	2	2	16,160 (16)	4	1	2	179	1.54	0.76	0.68	0.53	0.39	149,000	
200	21,918 (20)	4	2	2	20,200 (20)	4	2	2	221	1.92	0.95	0.84	0.65	0.48	149,000	
240	26,301 (24)	5	2	3	24,240 (24)	4	2	2	264	2.30	1.12	1.00	0.77	0.56	149,000	
525mA Fixture Operating at 25° C (77° F)																
40 ³	6,261 (04)	3	1	1	5,771 (04)	3	1	1	70	0.57	0.29	0.26	0.21	0.16	136,000	92%
60 ⁴	9,271 (06)	3	1	2	8,544 (06)	3	1	1	102	0.87	0.44	0.39	0.30	0.22	129,000	
80	12,361 (08)	4	2	2	11,392 (08)	3	1	2	133	1.14	0.56	0.49	0.39	0.29	129,000	
100	15,412 (10)	4	1	2	14,205 (10)	4	1	2	172	1.47	0.75	0.67	0.51	0.38	128,000	
120	18,495 (12)	4	2	2	17,045 (12)	4	1	2	204	1.76	0.88	0.78	0.60	0.44	128,000	
140	21,479 (14)	4	2	2	19,796 (14)	4	2	2	233	2.01	0.99	0.87	0.69	0.51	123,000	
160	24,548 (16)	4	2	2	22,624 (16)	4	2	2	265	2.29	1.11	0.98	0.78	0.57	123,000	
700mA Fixture Operating at 25° C (77° F)																
40 ³	7,648 (04)	3	1	1	7,048 (04)	3	1	1	93	0.79	0.40	0.35	0.27	0.20	111,000	90%
60 ⁴	11,323 (06)	3	1	2	10,436 (06)	3	1	2	137	1.18	0.59	0.51	0.39	0.29	111,000	

* For recommended lumen maintenance factor data see TD-13

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit www.iesna.org/PDF/Erratas/TM-15-07BugRatingsAddendum.pdf



General Description

Slim, low profile, easy mounting design. Luminaire sides are rugged cast aluminum with intergal, weather-tight LED driver compartments and high performance aluminum heat sinks specifically designed for LED lighting application. Pendant mount fixture is supplied with a 3/4" (19mm) NPT stainless steel pendant connection and single 5' (1.5m) cord out of the top of the pendant. Longer cords available; consult factory. Includes bug/debris guard. Five year limited warranty on fixture.

Electrical

Modular design accommodates varied lighting output from high power, white, 6000K (+/- 500K per full fixture), minimum 70 CRI, long life LED sources. Optional 4300K (+/- 300K per full fixture) also available. 120–277V 50/60 Hz, Class 1 LED drivers are standard. 347–480V 50/60 Hz driver is optional. LED drivers have power factor >90% and THD <20% at full load. Units provided with integral 10kV surge suppression protection standard. Surge protection tested in accordance with IEEE/ANSI C62.41.2.

Testing & Compliance

UL listed in the U.S. and Canada for wet locations and enclosure rated IP66 per IEC 60529. Consult factory for CE Certified products. Dark Sky Friendly. IDA Approved. RoHS compliant.



Finish


Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable silver powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Bronze, black, white and platinum bronze powder topcoats are also available. The finish is covered by our 10 year limited warranty.

Fixture and finish are endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117.

Patents

U.S. and international patents granted and pending. BetaLED is a division of Ruud Lighting, Inc. For a listing of Ruud Lighting, Inc. patents, visit www.uspto.gov.

Field-Installed Accessories



Bird Spikes
XA-BRDSPK




12" (305mm) Pendant Kit
XA-CL12KIT
(Pendant height to bottom of fixture; mounting accessories or surface boxes will add to overall height)




18" (457mm) Pendant Kit
XA-CL18KIT
(Pendant height to bottom of fixture; mounting accessories or surface boxes will add to overall height)



22" (559mm) Pendant Kit
XA-CL22KIT
(Pendant height to bottom of fixture; mounting accessories or surface boxes will add to overall height)





Leveler
XA-PNDTLVL
(For 0–13° sloped ceilings)



Pendant Fitting
XA-PSFTG

Photometrics

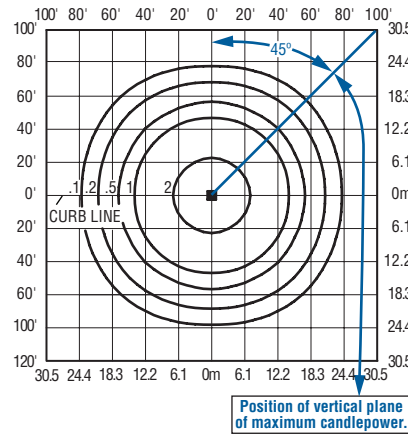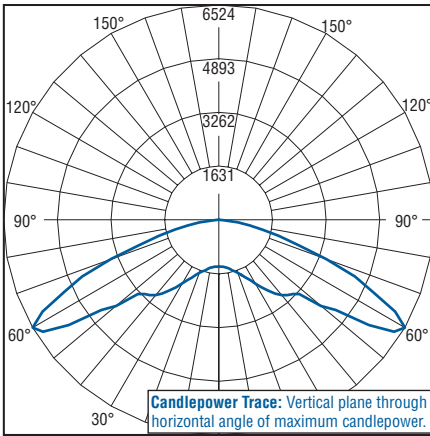

Independent Testing Laboratories certified test. Report No. ITL68092 Candlepower trace of 4300K, 120 LED Type V Short area luminaire with 17,059 initial delivered lumens operating at 525mA. All published luminaire photometric testing performed to IESNA LM-79-08 standards.

Isofootcandle plot of 4300K, 120 LED Type V Short area luminaire at 25' (7.6m) A.F.G. Luminaire with 17,045 initial delivered lumens operating at 525mA. Initial FC at grade.



© 2011 Ruud Lighting Inc. – A Cree Company. All rights reserved. The information in this document is subject to change without notice.
9201 Washington Ave • Racine, WI 53406-3772 • 800-236-6800 • www.betaLED.com



Made in the U.S.A. of U.S. and imported parts.
Meets Buy American requirements within the ARRA.