




Notes:

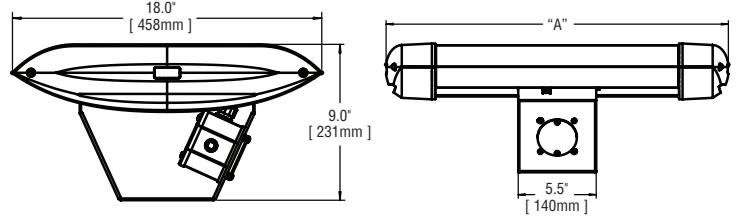

# of LEDs	40	60	80	100	120	140	160	200	240
Dim. "A"	16.06"	18.06"	16.06"	18.06"	20.06"	22.06"	24.06"	28.06"	32.06"

Product	Family	Optic	Mounting	# of LEDs (x 10)	LED Series	Voltage	Color Options	Drive Current Not Field Adjustable	Factory-Installed Options Please type additional options in manually on the lines provided above.
CAN	EDG	SL <sup>1</sup>	UP <sup>2</sup>	04 <sup>3</sup> 06 <sup>4</sup> 08 10 12 14 16 20 24	D	UL Universal 120–277V UH Universal 347–480V 12 120V 24 240V 27 277V 34 347V	SV Silver BK Black BZ Bronze PB Platinum WH White	350 350mA 525 <sup>5</sup> 525mA 700 <sup>6</sup> 700mA	43K 4300K Color Temperature <sup>7</sup> DIM 0–10V Dimming <sup>8,9</sup> F Fuse <sup>10,11,12</sup> HL Hi/Low (175/350/525, dual circuit input) <sup>13</sup> P Photocell <sup>12,14,15</sup> ML Multi-Level (75/525) <sup>13</sup>

Footnotes

- Sparkle petroleum distribution
- Uplight mount
- Uses 80 LED size with two blanks in outside positions
- Uses 100 LED size with two blanks in outside positions
- Available on fixtures with 40–160 LEDs
- Available on fixtures with 40–60 LEDs
- Color temperature per luminaire; 6000K standard; minimum 70 CRI
- Control by others
- Refer to dimming spec sheet for availability and additional information
- When code dictates fusing use time delay fuse
- Not available when UH voltage is selected
- Not available with all multi-level options. Refer to multi-level spec sheet for availability and additional information
- Refer to multi-level spec sheet for availability and additional information
- Must specify voltage other than UL or UH
- 120 LED maximum when 34 voltage is selected

LED PERFORMANCE SPECS

# of LEDs	Initial Delivered Lumens – Sparkle Petroleum @ 6000K	B U G		Initial Delivered Lumens – Sparkle Petroleum @ 4300K	B U G		System Watts 120–480V	Total Current @ 120V	Total Current @ 240V	Total Current @ 277V	Total Current @ 347V	Total Current @ 480V	L <sub>70</sub> Hours* @ 25° C (77° F)	50K Hours Lumen Maintenance Factor* @ 15° C (59° F)	
		Rating**			Rating**										
<b>350mA Fixture Operating at 25° C (77° F)</b>															
40 <sup>3</sup>	4,423 (04)	2	1	1	4,076 (04)	2	1	1	47	0.40	0.21	0.19	0.15	0.12	>150,000
60 <sup>4</sup>	6,548 (06)	2	1	1	6,035 (06)	2	1	1	68	0.58	0.30	0.26	0.20	0.16	>150,000
80	8,731 (08)	3	1	1	8,047 (08)	3	1	1	90	0.77	0.38	0.34	0.26	0.20	>150,000
100	10,886 (10)	3	1	1	10,033 (10)	3	1	1	111	0.95	0.47	0.42	0.32	0.24	>150,000
120	13,064 (12)	3	1	1	12,040 (12)	3	1	1	132	1.15	0.56	0.50	0.38	0.28	>150,000
140	15,172 (14)	3	1	1	13,983 (14)	3	1	1	157	1.34	0.67	0.61	0.47	0.35	149,000
160	17,339 (16)	4	2	1	15,981 (16)	3	2	1	179	1.54	0.76	0.68	0.53	0.39	149,000
200	21,674 (20)	4	2	1	19,976 (20)	4	2	1	221	1.92	0.95	0.84	0.65	0.48	149,000
240	26,009 (24)	4	2	1	23,971 (24)	4	2	1	264	2.30	1.12	1.00	0.77	0.56	149,000
<b>525mA Fixture Operating at 25° C (77° F)</b>															
40 <sup>3</sup>	6,192 (04)	2	1	1	5,706 (04)	2	1	1	70	0.57	0.29	0.26	0.21	0.16	136,000
60 <sup>4</sup>	9,168 (06)	3	1	1	8,576 (06)	3	1	1	102	0.87	0.44	0.39	0.30	0.22	129,000
80	12,224 (08)	3	1	1	11,266 (08)	3	1	1	133	1.14	0.56	0.49	0.39	0.29	129,000
100	15,241 (10)	3	1	1	14,047 (10)	3	1	1	172	1.47	0.75	0.67	0.51	0.38	128,000
120	18,289 (12)	4	2	1	16,856 (12)	4	2	1	204	1.76	0.88	0.78	0.60	0.44	128,000
140	21,241 (14)	4	2	1	19,576 (14)	4	2	1	233	2.01	0.99	0.87	0.69	0.51	123,000
160	24,275 (16)	4	2	1	22,373 (16)	4	2	1	265	2.29	1.11	0.98	0.78	0.57	123,000
<b>700mA Fixture Operating at 25° C (77° F)</b>															
40 <sup>3</sup>	7,518 (04)	2	1	1	7,163 (04)	2	1	1	93	0.79	0.40	0.35	0.27	0.20	111,000
60 <sup>4</sup>	11,132 (06)	3	1	1	10,606 (06)	3	1	1	137	1.18	0.59	0.51	0.39	0.29	111,000

\* For recommended lumen maintenance factor data see TD-13

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit [www.iesna.org/PDF/Erratas/TM-15-07BugRatingsAddendum.pdf](http://www.iesna.org/PDF/Erratas/TM-15-07BugRatingsAddendum.pdf)



### General Description

Slim, low profile, easy mounting design. Luminaire sides are rugged cast aluminum with integral, weather-tight LED driver compartments and high performance aluminum heatsinks specifically designed for LED lighting application. Uplight fixture is supplied with a heavy gauge steel mount bracket and convenient anchoring holes. Mounting bracket is provided with holes to accommodate four (4) 3/8" (10mm) or four (4) 1/4" (6mm) bolts (by others) The weather-tight J-Box is designed for through-wiring and wet location installations. Five year limited warranty on fixture.

### Electrical

Modular design accommodates varied lighting output from high power, white, 6000K (+/- 500K per full fixture), minimum 70 CRI, long life LED sources. Optional 4300K (+/- 300K per full fixture) also available. 120–277V 50/60 Hz, Class 1 LED drivers are standard. 347–480V 50/60 Hz driver is optional. LED drivers have power factor >90% and THD <20% at full load. Units provided with integral 10kV surge suppression protection standard. Surge protection tested in accordance with IEEE/ANSI C62.41.2.

### Testing & Compliance

UL listed in the U.S. and Canada for wet locations and enclosure rated IP66 per IEC 60529. Consult factory for CE Certified products. Dark Sky Friendly. IDA Approved. RoHS compliant.



### Finish

Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable silver powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Bronze, black, white and platinum bronze powder topcoats are also available. The finish is covered by our 10 year limited warranty.



Fixture and finish are endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117.

### Patents

U.S. and international patents granted and pending. BetaLED is a division of Ruud Lighting, Inc. For a listing of Ruud Lighting, Inc. patents, visit [www.uspto.gov](http://www.uspto.gov).

### Field-Installed Accessories

### Photometrics

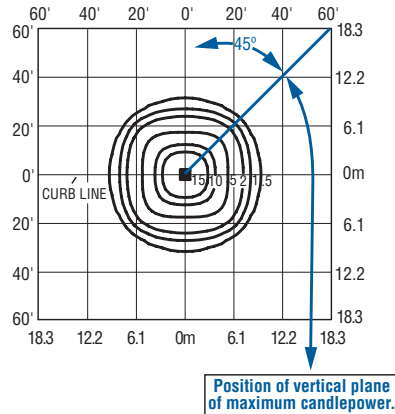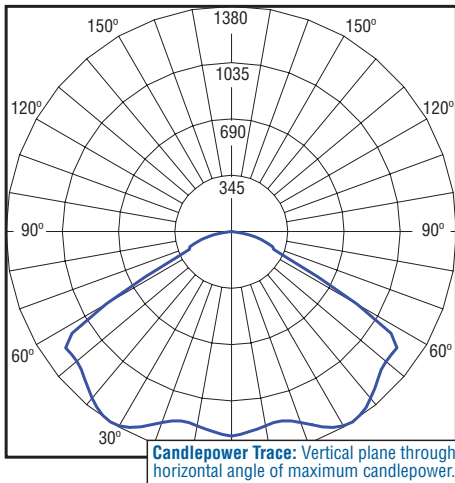

Independent Testing Laboratories certified test. Report No. ITL67630. Candlepower trace of 6000K, 60 LED Sparkle Petroleum luminaire with 11,973 initial delivered lumens operating at 700mA. All published luminaire photometric testing performed to IESNA LM-79-08 standards.

Isofootcandle plot of 4300K, 40 LED Type V Medium parking luminaire at 25' (7.6m) A.F.G. Luminaire with 6,543 initial delivered lumens operating at 700mA. Initial FC at grade.