

Notes:

Product	Family	Optic	Mounting	# of LEDs (x 10)	LED Series	Voltage	Color Options	Drive Current	Factory-Installed Options
STR	LWY	2M <sup>2</sup> 2MM <sup>2</sup>	AA <sup>3</sup>	10 11 12	D	UL Universal 120–277V UH Universal 347–480V	SV Silver <sup>4</sup> BK Black <sup>4</sup> BZ Bronze <sup>4</sup> PB Platinum Bronze <sup>4</sup> WH White <sup>4</sup>	700 700mA (Standard) 525 525mA 350 350mA	IP IP66 Classification 43K 4300K Color Temperature <sup>5</sup> DIM 0–10V Dimming <sup>6,7,8</sup> F Fuse <sup>9,10</sup> HL Hi/Low (175/350/525, dual circuit input) <sup>11,12</sup> N No Quick Disconnect Harness or Leveling Bubble <sup>13</sup> PD Power Door <sup>14</sup> R NEMA Photocell Receptacle <sup>9,15</sup> SC Door Safety Tether <sup>16</sup> ML Multi-Level (75/525) <sup>11</sup> UTL Utility <sup>17</sup>

Please type additional options in manually on the lines provided above.

Footnotes

- IESNA Type II Medium distribution with full backlight control
- IESNA Type II Medium distribution with partial backlight control
- Adjustable arm for mounting to 2" (2-3/8" [60mm] O.D.) tenon
- Light engine portion of extrusion is not painted and will remain natural aluminum regardless of color selection
- Color temperature per fixture; 6000K standard; minimum 70 CRI
- Control by others
- Refer to dimming spec sheet for availability and additional information
- Can't exceed specified drive current. Consult factory if exceeding drive current is necessary.
- Not available with all multi-level options. Refer to multi-level spec sheet for availability and additional information
- When code dictates fusing use time delay fuse
- Refer to multi level spec sheet for availability and additional information
- Sensor not included
- Standard product features unless N option is specified
- All connections between door and fixture are shipped unconnected from the factory; door release spring included to open door automatically when the latches are released
- Photocell by others
- Stainless steel aircraft cable
- Includes exterior wattage label that reflects watts for the drive current selected. The ability to exceed the selected drive current will be disabled.

LED PERFORMANCE SPECS

# of LEDs	Initial Delivered Lumens – Type II Medium w/ Backlight Control @ 6000K	B U G		Initial Delivered Lumens – Type II Medium w/ Partial Backlight Control @ 6000K	B U G		Initial Delivered Lumens – Type II Medium w/ Backlight Control @ 4300K	B U G		Initial Delivered Lumens – Type II Medium w/ Partial Backlight Control @ 4300K	B U G		System Watts 120–480V	Total Current @ 120V	Total Current @ 240V	Total Current @ 277V	Total Current @ 347V	Total Current @ 480V	L <sub>70</sub> Hours* @ 25° C (77° F)	50K Hours Lumen Maintenance Factor* @ 15° C (59° F)				
		Rating**				Rating**					Rating**											Rating**		
<b>350mA Fixture Operating at 25° C (77° F)</b>																								
100	7,273 (10)	1	2	2	8,527 (10)	2	2	2	6,703 (10)	1	2	1	7,859 (10)	2	2	2	111	0.97	0.52	0.46	0.34	0.26	> 150,000	94%
110	7,953 (11)	1	2	2	9,325 (11)	2	2	2	7,330 (11)	1	2	2	8,594 (11)	2	2	2	122	1.08	0.58	0.51	0.37	0.28	> 150,000	
120	8,614 (12)	1	2	2	10,099 (12)	2	2	2	7,939 (12)	1	2	2	9,308 (12)	2	2	2	133	1.17	0.62	0.55	0.39	0.30	> 150,000	
<b>525mA Fixture Operating at 25° C (77° F)</b>																								
100	10,183 (10)	1	3	2	11,938 (10)	2	3	2	9,385 (10)	1	2	2	11,003 (10)	2	3	2	163	1.42	0.74	0.65	0.50	0.37	139,000	93%
110	11,135 (11)	1	3	2	13,055 (11)	2	3	2	10,262 (11)	1	3	2	12,032 (11)	2	3	2	178	1.58	0.83	0.71	0.54	0.40	137,000	
120	12,060 (12)	2	3	2	14,139 (12)	2	3	2	11,115 (12)	1	3	2	13,031 (12)	2	3	2	195	1.70	0.89	0.76	0.58	0.43	133,000	
<b>700mA (Standard) Fixture Operating at 25° C (77° F)</b>																								
100	12,728 (10)	2	3	2	14,923 (10)	2	3	2	11,731 (10)	2	3	2	13,753 (10)	2	3	2	228	1.96	1.02	0.86	0.67	0.49	116,000	91%
110	13,918 (11)	2	3	2	16,318 (11)	2	3	2	12,828 (11)	2	3	2	15,040 (11)	2	3	2	250	2.16	1.12	0.94	0.73	0.54	113,000	
120	15,075 (12)	2	3	2	17,674 (12)	3	3	3	13,894 (12)	2	3	2	16,289 (12)	2	3	2	272	2.31	1.26	1.01	0.79	0.58	108,000	

\* For recommended lumen maintenance factor data see TD-13

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit [www.iesna.org/PDF/Erratas/TM-15-07BugRatingsAddendum.pdf](http://www.iesna.org/PDF/Erratas/TM-15-07BugRatingsAddendum.pdf)

NOTE: All data subject to change without notice.

© 2011 BetaLED®, a division of Ruud Lighting • 1200 92nd Street • Sturtevant, WI 53177 • 800-236-6800 • [www.betaLED.com](http://www.betaLED.com)



Made in the U.S.A. of U.S. and imported parts.  
Meets Buy American requirements within the ARRA.



**General Description**

Fixture housing is all aluminum construction. Standard fixture utilizes terminal block for power input suitable for #2-#14 AWG wire and operates at 700mA. Drive current is field switchable. Adjustable mounting arm is rugged die cast aluminum and mounts to a 2" (51mm) IP tenon. Two axis T-level included to ensure level installation when desired. Fixture carries a limited five year warranty.

**Electrical**

Modular design accommodates varied lighting output from high power, white, 6000K (+/- 500K per full fixture), minimum 70 CRI, long life LED sources. Optional 4300K (+/- 300K per full fixture) also available. 120-277V 50/60 Hz, Class 1 LED drivers are standard. 347-480V 50/60 Hz option is available. LED drivers have power factor >90% and THD <20% at full load. Quick disconnect harness suitable for mate and break under load provided on power feed to driver for ease of maintenance. Units provided with integral 10kV surge suppression protection standard. Surge protection tested in accordance with IEEE/ANSI C62.41.2.

**Finish**

Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable silver powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Bronze, black, white and platinum bronze powder topcoats are also available. The finish is covered by our 10 year limited warranty.

Fixture and finish are endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117.

**Testing & Compliance**


UL listed in the U.S. and Canada for wet locations and enclosure classified IP66 per IEC 60529. Consult factory for CE Certified products. RoHS Compliant.




**Patents**

U.S. and international patents granted and pending. BetaLED is a division of Ruud Lighting, Inc. For a listing of Ruud Lighting, Inc. patents, visit www.uspto.gov.

**Field-Installed Accessories**




**Bird Spikes for Light Engine**  
XA-BRDSPK120




**Bird Spikes Kit for Housing**  
XA-BRDSPKHSG


**Photometrics**

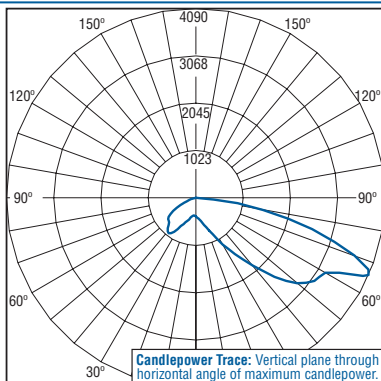


Independent Testing Laboratories certified test. Report No. ITL68358. Candlepower trace of 6000K, 40 LED LEDway Streetlight luminaire with IESNA Type II Medium distribution w/ backlight control. Luminaire with 5,373 initial delivered lumens operating at 700mA. All published luminaire photometric testing performed to IESNA LM-79-08 standards.

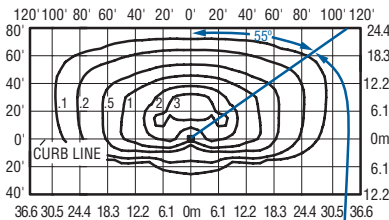

Isofootcandle plot of 6000K, 120 LED LEDway Streetlight luminaire with IESNA Type II Medium distribution w/ backlight control mounted at 25' A.F.G. Luminaire with 15,075 initial delivered lumens operating at 700mA. Initial FC at grade.

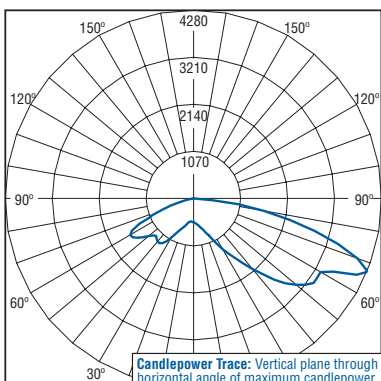

Independent Testing Laboratories certified test. Report No. ITL68432. Candlepower trace of 4300K, 40 LED LEDway Streetlight luminaire with IESNA Type II Medium distribution w/ partial backlight control. Luminaire with 5,725 initial delivered lumens operating at 700mA. All published luminaire photometric testing performed to IESNA LM-79-08 standards.

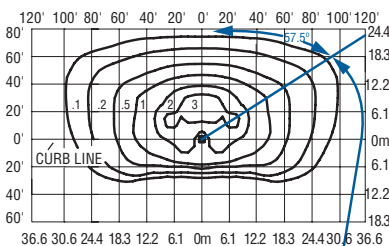

Isofootcandle plot of 4300K, 120 LED LEDway Streetlight luminaire with IESNA Type II Medium distribution w/ partial backlight control mounted at 25' A.F.G. Luminaire with 17,674 initial delivered lumens operating at 700mA. Initial FC at grade.

**LEDway® EPA & Weight Calculations**

<b>Approximate Weight 120-480V<sup>1</sup></b>	
100-120 LED fixture	26.0 lbs. (11.8kg)
<b>EPA</b>	
<b>Adjustable Arm Mount<sup>2</sup></b>	
1 fixture	0.880
<b>EPA</b>	
<b>Round External Mount / Square Internal Mount Horizontal Tenons with Fixture(s)</b>	
PT-1H/PD-1H4	Single 1.100
PT-2H(90)/PD-2H4(90)	90° Twin 1.439
PT-2H(180)/PD-2H4(180)	180° Twin 1.920
PT-3H(90)/PD-3H4(90)	90° Triple 2.104
PT-3H(120)	120° Triple 1.884
PT-4H(90)/PD-4H4(90)	90° Quad 2.508
<ol style="list-style-type: none"> <li>Add 5 lbs. (2.3kg) for transformer in 347-480V fixtures when multi-level options are selected.</li> <li>Consult factory for EPA values when mounting fixtures at aiming angles other than 0°</li> </ol>	

NOTE: All data subject to change without notice.

© 2011 BetaLED®, a division of Ruud Lighting • 1200 92nd Street • Sturtevant, WI 53177 • 800-236-6800 • www.betaLED.com

Made in the U.S.A. of U.S. and imported parts.  
Meets Buy American requirements within the ARRA.

